

3D PRINTING PROPOSAL FOR VEHICLE LICENSE PLATES THROUGH PROCESS SIMULATION IN TEGUCIGALPA, HONDURAS.

**Alejandra Sánchez Villeda¹, Gustavo Rosales Cadenas², Mendel Nelson³, Paola Pascua Cantarero⁵,
Roberto Segura Ponce⁴**

Universidad Tecnológica Centroamericana (UNITEC) ^{1,2}

Boulevard Kennedy, V-782, frente a Residencial Honduras, Tegucigalpa, Honduras^{1,2}

alejandra_sanchez@unitec.edu¹; gustavo.rosales@unitec.edu²; mendel.nelson@unitec.edu.hn³;

paola.pascua@unitec.edu.hn⁴; rsegura@unitec.edu⁵

Abstract - This project focuses on the production of vehicle license plates in Honduras using 3D printing with recycled PETG filament, complemented by process simulation to optimize workflow. The initial design of the plates was developed in SolidWorks and subsequently evaluated and adjusted using 3D printers like the Bambu Lab A1, ensuring structural quality and proper layer adhesion. Through cost engineering, the economic benefits of manufacturing with recycled PETG were analyzed, demonstrating that this methodology reduces costs while promoting a sustainable and efficient additive manufacturing model. The identification of critical stages in the process, supported by simulations in FlexSim, provided valuable insights for future large-scale implementations, offering an economically and environmentally responsible solution to the shortage of vehicle license plates in the country.

Keywords: 3D Printing, Recycled PETG, Process Simulation, Additive Manufacturing, Cost Engineering

1. Introduction

Honduras is experiencing a crisis in the transportation system due to the shortage of material used in the manufacture of vehicle plates nationwide. The Property Institute (IP), the regulatory body for the issuance of vehicle plates, is currently facing difficulties in meeting demand due to the problem of acquiring materials from its suppliers. Due to this crisis, vehicle plates have not been issued in traditional material, but rather provisional paper identifications have been used, which is unsafe and has generated commotion among citizens. [1]. Due to this problem, this research has arisen, which proposes the manufacture of vehicle plates in 3D printing and also the use of recycled PETG filament. Research carried out in Panama [2] and Honduras [3] have highlighted the feasibility of using materials such as recycled polymers for 3D printing. These investigations have applied various engineering methodologies from the Design of Experiments and the analysis through simulators [4]. The contributions of these promote good practices of sustainability and responsibility with the environment. In accordance with these initiatives, this project proposes to apply it in the manufacture of vehicle plates. 3D printing processes offer advantages such as rapid manufacturing of functional parts, shorter delivery times and lower costs in research and development [5]. As tools for carrying out this research, the SolidWorks computer-aided design software was used for the design used in the printing of vehicle plates, the FlexSim industrial process simulation software to simulate the printing process of the plates and the 3D printer instrument for printing the plates.

2. Methodology

2.1. Research Approach

This research used a quantitative approach, the tools and analysis applied is from an engineering point of view. With this approach, the feasibility of manufacturing vehicle lockers by 3D printing and using recycled PETG filament was evaluated, taking into consideration the production costs, such as the number of printers needed to meet a specific demand or objective.

2.2. Research Scope

The scope of this project is correlational, since it sought to identify and analyze the relationships that exist between the variables that are involved in the manufacturing process of 3DP vehicle license plates. It explored how material consumption, printing time, and the number of available printers contribute to the cost of 3DP printed vehicle license plates.[6]

2.3. Population and Sample

2.3.1. Population

The population of this study comprised ten license plates that are suitable for 3D printing using recycled PETG filaments. The suitability of the plates to be printed was defined by compliance with the size and design standards required for vehicle use, considering variations in filament color and material consumption in grams and meters.

2.3.2. Sampling Method

The type of sampling used is non-probabilistic for convenience due to the availability of recycled PETG filament at present. With this type of selection sampling, relevant variations such as behavior and material consumption during printing were captured. This approach responded to the need to obtain material consumption data relevant to economic analysis. [6]

2.3.3. Sample

The research sample consisted of physical 3D printing using recycled PETG filament of six vehicle license plates. The 3D printing of six vehicle license plates allowed obtaining tangible data regarding material consumption, comparing and validating with the data obtained from the 3D printing software prediction.

In this sample, the benefits of simulation and physical 3D printing tests were combined, because the simulations provided predictions on the behavior of the prints, while the physical printing of six plates allowed validation of the simulation data helping to generate a detailed analysis of the material and the process.

2.4. Variables Analyzed

2.4.1. Independent Variables

The independent variables in this study include the material used and the printing parameters. The material, in this case, is recycled PETG filament. The printing parameters, such as nozzle temperature, printing speed and layer thickness, are also considered independent variables.

2.4.2. Dependent Variables

The dependent variables in this research include production time, production cost, economic feasibility and the number of printers needed to satisfy the process demand. Production cost is analyzed in terms of material, energy and labor consumption. Economic feasibility is evaluated by considering the total projected cost of material versus the demand for license plates. The number of printers required is calculated to meet the demand in different simulated scenarios.

3. Results and Analysis

3.1 Design and Modeling of License Plates

3.1.1. Design Piloting and 3D Printing for Validation

The piloting process consisted of an iterative cycle that integrated the design in CAD software, 3D printing and the analysis of the piloting results, with the main purpose of validating the preliminary design of the vehicle plates. This process began with the development of the base model in SolidWorks, then this design was 3D printed to evaluate its characteristics and analyze points of improvement in the design so that it complied with the vehicle plate standards. For this reason, two tests were carried out, which resulted in two pieces resulting from the piloting tests. [6]

3.1.1.1. Design Piloting and 3D Printing for Validation

The development of the preliminary design of the license plate in the first pilot began with a basic SolidWorks model that served as a starting point for the pilot tests. This initial design considered the standard dimensions of vehicle license plates in Honduras, see *Fig. 1: SolidWorks vehicle plate design 1:*

Length: 30 cm

Width: 16 cm

Thickness: 2mm



Fig. 1: SolidWorks vehicle plate design 1

Following the evaluation of the first pilot, necessary adjustments were identified and a second, more detailed and complete design was developed. This model, see *Fig. 2 SolidWorks vehicle plate design 2* included adjustments such as:

- Internal blue line: An internal line was added for the blue stripe characteristic of the Honduran plates. This line, located 4 cm from the outer edge.
- Corner rounding: To improve functionality, corners were rounded to a radius of 1.03 cm. This reduces the risk of edge fractures and ensures a better aesthetic finish.
- Inner edge: An internal black border was generated using the offset tool, creating a uniform 8 mm border towards the inside of the plate, which gives it greater rigidity and an improved aesthetic appearance.
- Text Correction ("Central America"): In SolidWorks, the text "Central America" was adjusted to include the accent on the letter "e", ensuring that the design is correctly represented in print.

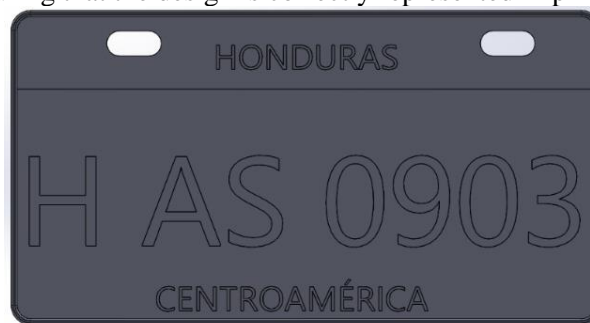


Fig. 2 SolidWorks vehicle plate design 2

3.1.1.2. Design Piloting and 3D Printing for Validation

The first print run was carried out on a reduced-scale Prusa MK4 printer (40%), which allowed us to identify the necessary adjustments that had been made to SolidWorks design two. In the final stage, design two was printed on the Bambu Lab A1, adjusting the plate thickness to 4 mm for greater strength. Due to printer limitations, the plates were manufactured in two parts joined together afterwards.

Pilot validation was essential in additive manufacturing projects, such as vehicle license plates, as it allows preliminary designs to be evaluated and adjusted before their full implementation. This approach reduces costs associated with errors and minimizes material and time waste, taking advantage of rapid iterations in CAD and prototypes to solve problems at early stages [7].

3.1.2 Manufacturing Test Setup

At this stage, the printing parameters were defined and adjusted to ensure the quality and consistency of the 3D printed license plates with recycled PETG filament. The settings were established on the Bambu Lab A1 printer, ensuring a balance between quality, durability and efficiency in material consumption. The printing parameters were adjusted based on the results observed in the prototypes and were defined as follows:

- Extrusion nozzle temperature: 239 °C
- Printer base temperature: 64 °C
- Printing speed: 50 mm/
- Layer thickness: 0.2 mm
- Adjusted thickness: 4 mm

3.1.3 Physical Test Results

The results of the physical printing tests provided detailed information on the behavior of the recycled PETG filament and the quality of the printed vehicle license plates. As the plates were made in two pieces due to machine limitations, the data for each piece is specified:

The data obtained for part A include:

- Production Time: On average, each vehicle plate took 3 hours 54 minutes to print.
- Material Consumption: Each printed plate used an average of 130.45 grams of PETG filament.

The data obtained for part B include:

- Production Time: On average, each vehicle plate took 1 hour 24 minutes to print.
- Material Consumption: Each printed plate used an average of 31.61 grams of PETG filament.



Fig. 3 Final result of printing vehicle license plates in 3D printing.

The *Fig. 3 Final result of printing vehicle license plates in 3D printing.* shows the final product of the 3D printed license plate, this is the result of joining Part A and Part B. In order to reach this final product, a process was established that will be described in the following section.

3.2 Print Process Flow Analysis

The process flow analysis helped to clearly visualize the operation of the process performed for 3D vehicle license plate printing. A summary table of the process flow diagram has been made, in which you can see the stages of the process, the activity performed at that stage, and the result obtained from that stage. See *Table 1 Vehicle license plate 3D printing process.*

Table 2 Vehicle license plate 3D printing process

Stage	Activity	Result
Start	Receive the request to print a vehicle plate.	Start of the process.
Preparation	Enter the requested plate number into the pre-designed template and check the filament's condition and quantity.	Plate with the required number designed, and printer loaded with sufficient, well-conditioned filament.
Printing Start	Send the print file via Wi-Fi network.	Printing begins.
Supervision	Supervise the printing process.	If paused, identify the cause of the interruption.
Error Correction	Correct errors based on the nature of each one.	Resume the printing process.
Printing Completion	Printing completed.	Remove the printed piece.
Quality Control	Pass to quality control and inspect the plate.	If it meets quality standards, it is approved; if not, it is discarded.
End of Process	The plate passes quality control.	Vehicle plate product completed.

With the information on how the printing process is carried out, it was possible to identify the stages and critical stages that are important for the operation of the system.

3.2.1 Identification of Critical Steps

Through the analysis of the printing process, the critical stages were highlighted as follows:

- Filament check: If there is not enough filament load, the print will be incomplete. In case of a bad filament the print may fail.
- Continuous monitoring in printing: Be aware of any interruption in order to solve it and not generate major delays in the production line.
- Quality control: Do not approve a product that does not meet the requirements.

The critical stages above have been extracted from the flow chart that was used to clearly visualize the structure of each stage, how it is performed and what its result is, this helps to understand the flow of the printing process. The flow chart is in the full report of this research. This utility highlights [8] that process analysis through visual tools such as the flow chart, allows to visualize bottlenecks, inefficiencies and opportunities for improvement. Given the understanding of the 3D vehicle license plate manufacturing process, the activities are carried out in relation to the simulation model in FlexSim.

3.3.1. Piloting of the simulation model in FlexSim

As a preliminary stage of the research, a pilot test of the simulation model was carried out to validate it before carrying out larger-scale simulations. At this stage, the accuracy of the model in being able to replicate the process with the conditions observed in the physical 3D printing tests was identified, as well as the printing and machine preparation times through the simulations issued by the printing software.

3.3.1.1. Simulation Model Formulation in FlexSim

The simulation of the process in FlexSim replicated the process of plate printing from receiving the order to make a license plate to the printed license plate. The processes were represented in the simulation by the tool objects that FlexSim provides. The replicated times are in units of seconds, so the current model that covers a time from 8 am to 5 pm is 32,400 seconds.

With the information collected from the observed times in the design, printing and joining processes, the processing times were configured with probabilistic distributions. The distributions for each of the printing and joining processes were made in the Expertfit software found within the same FlexSim software. The distributions are found in *Table 3*.

Table 3 Time distribution

Activity	Processing Price Distribution
Piece A	Johnson SB Distribution
Piece B	Beta Distribution
Union	Beta Distribution

3.3.1.2. Validation of the Simulation model in FlexSim

The simulation model performed in FlexSim to simulate the plate printing process must be statistically validated, the performance indicators that the simulation yields must be equal to the real data. The simulation model performed in FlexSim to simulate the plate printing process must be statistically validated, the performance indicators that the simulation yields must be equal to the real data.

Table 3 Tests for two-sample variance

	Variable 1	Variable 2
Mean	1	1
Variance	0	0
Observations	10	15
Degrees of Freedom	9	14
F	65535	
P(F<=f) one-tail		
Critical Value for F		0.33052686

As shown in the table above, Table 3 Tests for two-sample variance, by means of the F test for variances of two samples it was possible to verify that the variances were equal, therefore, the T test was carried out assuming equal variances and the model was statistically validated. The validated model verifies that the time measurements and distributions carried out in Experfit were carried out correctly and can be used to propose a new model in Flexsim.

3.3.2 Simulation Results in FlexSim

The current situation of the printing process has only one printer that is in charge of printing Part A and Part B and a station for joining parts, which in a day from 8 a.m. to 5 p.m. is only capable of completing a full plate, which we can visualize as KPI Printed Plates in *Table 3*.

Table 4 Comparative table of current and proposed situation

	Current Situation	Proposed Situation
Number of Printers	1	2
KPI Printed Plates	1	2

To start with the proposed situation, the key part was to choose two printers, one printer being in charge of printing Part A and another to print Part B. By simulating the process we were able to identify the bottleneck in the vehicle license plate manufacturing process, thereby analyzing the critical stage by which the process capacity is compromised. With the proposed situation of two independent printers for part A and part B in the simulation model, it is possible to manufacture two vehicle plates per work day. In the proposed simulation model there are three parameters that can be modified in quantity. The three parameters are: quantity of printers for Part A, quantity of printers for Part B and quantity of part joining stations. These parameters can be modified in Experimenter, which is a tool that FlexSim has, in which different scenarios can be evaluated by modifying the existing quantity of parameters, performing an analysis to be able to make informed decisions. Highlighting [9] that the simulation generates a great benefit for us by being able to modify parameters to visualize their improvement in the result of the process.

3.4 Economic feasibility

3.4.1 Cost analysis per plate

To determine the economic viability of the 3D license plate printing proposal, we began by analyzing the costs associated with printing license plates, such as filament consumption and energy expenditure. Detailed cost data can be found in the full report of this research.

The identification of filament consumption has been essential to be able to find the monetary cost per plate after printing. [10] The estimation of costs in the early stages of a project is essential to be able to evaluate budgets and analysis in an effective way. To estimate the total cost per plate, the energy consumption of the printers during the time they are working when manufacturing each plate was finally taken into consideration [11].

Table 5 Cost of materials per plate

Cost of Roll Used per Plate (Lempiras)	Printing Energy Consumption (Lempiras)	Total Plate Cost (Lempiras)
L79.47	L11.06	L90.53

Considering these two factors that directly affect the production of vehicle license plates, it was estimated that the cost per plate would be L.90.53. The price is considered optimal and of great savings considering the costs of the metallic vehicle license plates that circulate in the country. Economic savings demonstrate a great benefit as well as the recycled material contributes to the reduction of environmental impact [11].

Considering detailed costs in *Table 5 Cost of materials per plate*, which directly affect the production of vehicle plates, it was estimated that the cost per plate will be L.90.53. The price is considered optimal and a great savings considering the costs of metal vehicle plates that circulate in the country. The economic savings demonstrate a great benefit as well as the recycled material contributes to the reduction of environmental impact [12]

4. Conclusion

1. A methodology was defined to manufacture vehicle plates using 3D printing with recycled PETG filament. The design in SolidWorks and pilot tests on 3D printers such as Prusa MK4 and Bambu Lab A1 allowed for the adjustment of critical parameters such as the thickness, which had to be 4 mm to ensure strength and durability.
2. FlexSim analysis and physical tests identified the bottleneck in printing Part A, with an average time of 3 hours and 40 minutes. These tests identified the need to evaluate scenarios to optimize efficiency through simulation and pointed out the need to improve the technology used in printing the plates.
3. The simulation model in FlexSim validated that with one printer per part, only one complete plate is produced in an 8-hour workday. It was proposed to separate stations and assign one printer per part, increasing production to two plates per day. Using Experimenter, scenarios were evaluated to determine the optimal number of printers needed to increase production.
4. The average manufacturing cost per plate was estimated at 90.53 lempiras, considering the consumption of recycled PETG filament and electrical energy, using a Bambu Lab A1 multicolor printer.
5. In general, the 3D printing process of vehicle plates with recycled PETG is economically viable, reducing manufacturing costs. However, the average printing time of 5 hours and 6 minutes limits the capacity to meet demand in Honduras. The computerized design of the plates meets the required measurements.

5. Recommendations

5.1 Research Recommendations

- To expand the analysis of variables involved in 3DP, exploring different types of recycled filaments. In order to compare and study the efficiency, strength and durability of the materials.
- Create a design that meets specifications but has a shorter print time for faster production and improved production capacity.
- Use industrial printers that can print the plate at its standard scale, without the need to make the pieces separately and avoid joining them together, which delays production time.
- For better quality research, future researchers are advised to simulate times on a printer that can print the plate in its size, thus speeding up the production process.

5.2 Recommendations for the Business Line or Group of Companies

- The entities in charge of the production of vehicle license plates with the adoption of 3D printing technology can benefit the manufacturing process, due to its reduction in production costs and the environmental impact it generates by using recycled material.
- Establishing alliances with suppliers of recycled materials would also strengthen the supply chain, promoting the circular economy in the industry and reaffirming the commitment to environmental sustainability.

References

- [1] Mundo, E. (2023, 29 de junio). Escasez de placas de vehículos en Honduras genera preocupación en importadores. *Diario El Mundo*. <https://elmundo.hn/la-escasez-de-placas-de-automoviles-genera-preocupacion-en-el-sector-importadores-exigen-soluciones/>
- [2] Marín, N., Serrano, M., Serrano, M., & Jaén, A. (2021). Propuesta de materiales reciclables para la fabricación de placas vehiculares en la República de Panamá. *Revista De Iniciación Científica*, 7(1), 54–59. <https://doi.org/10.33412/rev-ric.v7.1.3059>.
- [3] Sosa, G. (2024). Feasibility of manufacturing and utilizing recycled PET 3D printing filaments through design of experiments. *Universidad Tecnológica Centroamericana (UNITEC)*.
- [4] G. Aguilar, S. Santos, and ME Perdomo, "Analysis of the Mechanical Properties of 3D Printed Structures and Comparison of Results through Simulations in Solidworks Software," *Proceedings of the 10th World Congress on Mechanical, Chemical, and Material Engineering (MCM'24)*, Barcelona, Spain, Aug. 22-24, 2024, Paper No. ICMIE 133, doi: 10.11159/icmie24.133.
- [5] Al Rashid, A., & Koç, M. (2023). Additive manufacturing for sustainability and circular economy: Needs, challenges, and opportunities for 3D printing of recycled polymeric waste. *Materials Today Sustainability*, 24, 100529. <https://doi.org/10.1016/j.mtsust.2023.100529>
- [6] Hernández Sampieri, R., Fernández Collado, C., & Baptista Lucio. (2018). *Metodología de la Investigación*. McGraw-Hill.
- [7] Gibson, I., Rosen, D. W., & Stucker, B. (2015). *Additive manufacturing technologies: 3D printing, rapid prototyping, and direct digital manufacturing*. Springer.
- [8] Harrington, H. J. (1991). *Business Process Improvement: The Breakthrough Strategy for Total Quality, Productivity, and Competitiveness*. McGraw-Hill.
- [9] Banks, J., Carson, J. S., Nelson, B. L., & Nicol, D. M. (2010). *Discrete-event system simulation*. Pearson.
- [10] Barrios, C., & Miranda, M. (2006). Diseño de un sistema de uso didáctico para el análisis y cálculo de costos de producción (método tradicional) para la asignatura de ingeniería de costos de la facultad de ingeniería industrial de la Universidad Simón Bolívar. *Universidad Simón Bolívar*.
- [11] Alonso, L. V. (2009). *Ingeniería de Costos*.
- [12] Beltrán, J. (2023). Metodología y/o factibilidad del aprovechamiento de material (PLA, PETG) residual en la manufactura aditiva. *Universidad Tecnológica de Pereira*. Recuperado de <https://repositorio.utp.edu.co/server/api/core/bitstreams/9d1486cc-14a4-42aa-9bdb-960851038d70/content>